




SUPERABRASIVES

Bileme Taşları
Grinding Wheels

GRINDEX 630

TESTERE BİLEME SIVISI
SAWBLADE GRINDING COOLANT

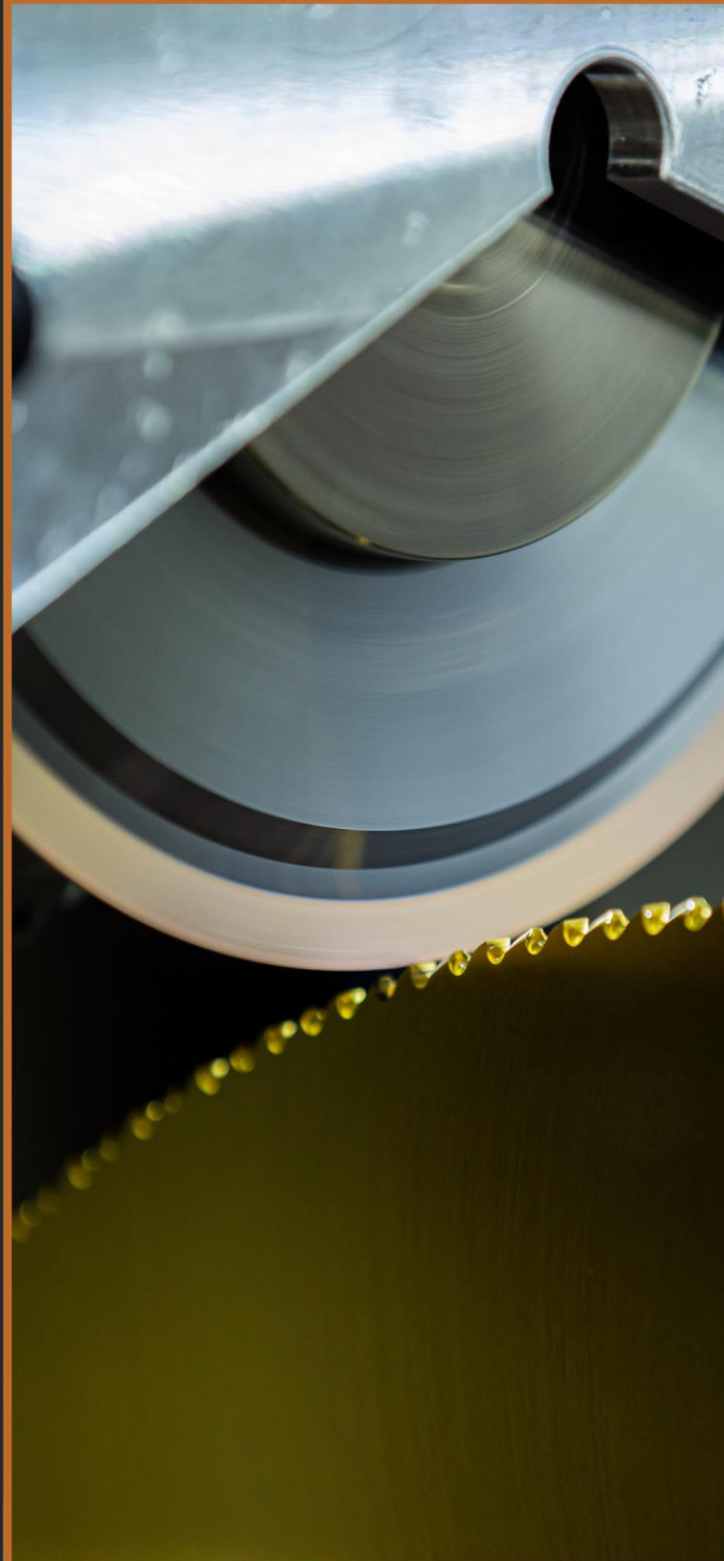




Bileme Taşları Grinding Wheels

+90 232 782 66 44 (Whatsapp)
+90 232 782 23 90
info@abmmakine.com
ITOB ATATÜRK Cad. NO:56
Menderes, İzmir - TÜRKİYE


14F1 CBN Bileme Taşı / CBN Grinding Wheel



12V2 Cermet Bileme Taşı / Cermet Grinding Wheel



11A2 CBN / DIA Bileme Taşı / Grinding Wheel

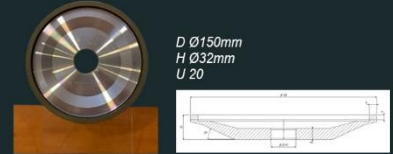


12V2 TCT İç Bileme Taşı / TCT Face Grinding Wheel




12V2 TCT İç Bileme Taşı / TCT Face Grinding Wheel



12V2 TCT İç Bileme Taşı / TCT Face Grinding Wheel

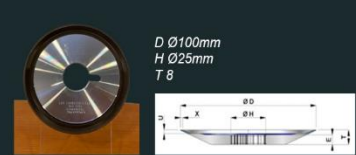

14A1 TCT Sırt Bileme Taşı / TCT Top Grinding Wheel

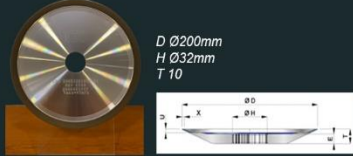

6AA9 TCT Sırt Bileme Taşı / TCT Top Grinding Wheel



6AA9 TCT Sırt Bileme Taşı / TCT Top Grinding Wheel




1BF1 CBN Bileme Taşı / CBN Grinding Wheel




3A1 TCT Yan Bileme Taşı / TCT Side Grinding Wheel



6AA9 TCT Yan Bileme Taşı / TCT Side Grinding Wheel

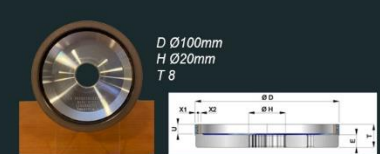


1A1 Chipbreaker Bileme Taşı / Grinding Wheel (Metal)

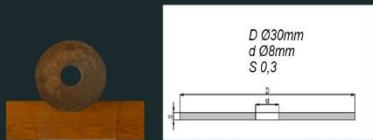

1A1 Chipbreaker Bileme Taşı / Grinding Wheel (TCT)



1A1W Oluklu Bileme Taşı / Hollow Face Grinding Wheel



GRINDEX 630

TESTERE BİLEME SIVISI SAWBLADE GRINDING COOLANT

GRINDEX 630 ekstra yüksek performanslı saf kesme yağlarıdır. Klorin içermezler. İşlenmesi güç sert madenlerin ve takım çeliklerinde yapılacak bileme ve imalat işlemleri için geliştirilmiştir. Önde gelen diğer üstün kalite kesme yağlarına kıyasla 630 Serisi, yüzey kalitesi, aşındırıcı bileme taşı ömrünü artırma ve uç kaynama kontrolü açısından üstün performans sergiler. Açık renkleri sayesinde işlenen parçanın makineyle işleme uygulamaları sırasında açıklıkla görülebilmesi sağlanır. Sürekli olarak dar işleme toleransları ve bu sayede tekrarlama hassasiyeti elde edilir. Bu saf yağlar CNC takım tezgahları işlem alanında yağ sisi oluşumunu engelleyecek şekilde formüle edilmiştir, böylelikle daha güvenli ve konforlu bir çalışma ortamı sağlar.

CNC tezgahların kullanıldığı kapsamlı geliştirme testlerinin yanında dünya çapında geniş kapsamlı müşteri değerlendirmeleri sayesinde 630 Serisinin ürünleri birçok takım imalatçısı ve bileme atölyesinin tercih ettiği ürünler arasında yer alır.

GRINDEX 630 Serisi ürünler klorin içermeyen ve düşük sis oluşturan katık sistemi ile bu ailenin önde gelen üyeleri arasındadır. Bu formülasyon geniş uygulama alanlarında mükemmel bir performansı sergilerken, aynı zamanda klorin içermemesi nedeniyle çevre sağlığı ve atık imhası konusunda avantaj sağlar.

GRINDEX 630 is an extra high performance neat cutting oil. It does not contain chlorine. It has been developed for grinding and manufacturing operations on hard metals and tool steels. Compared to other leading high quality cutting oils, the 630 Series offers a superior performance in terms of surface quality, increased abrasive grinding wheel life and finishing burr control. Thanks to the light color, it ensures that the workpiece can be clearly seen during grinding applications. Constantly narrow machining tolerances and thus repeatability are achieved. This neat oils is formulated to prevent oil mist formation in the CNC machine tool processing area, thus providing a safer and more comfortable working environment.

Thanks to extensive development tests using CNC machines and extensive customer evaluations worldwide, the products of the 630 Series are among the most preferred products of many tool manufacturers and grinding shops.

GRINDEX 630 Series products are among the leading members of this family with their chlorine-free and low mist additive system. This formulation exhibits excellent performance in a wide range of applications, while also providing advantages in terms of environmental health and waste disposal due to its chlorine-free nature.

Kinematik Viskozite	8
cSt @ 40°C	2,82
cSt @ 100°C	185
Parlama Noktası, °C, COC	0,84
Özgül Ağırlık @ 15°C, kg/l	1,0
Aktif Kükürt	Yok
Klorin	Mevcut
Yağ Sisi Önleme Paketi	Mevcut
Sürtünme Azaltıcı	Mevcut

Kinematic Viscosity	8
cSt @ 40°C	2,82
cSt @ 100°C	185
Flash Point, °C, COC	0,84
Specific Gravity @ 15°C, kg/l	1,0
Active Sulfur	Free
Chlorine	Available
YOil Mist Prevention Package	Available
Friction Reducer	Available

